

## PRODUCT



# SOLARWATT Panel

vision H 3.0 (365 Wp) pure  
vision H 3.0 (370 Wp) pure  
vision H 3.0 (375 Wp) pure

## Glass-Glass module

### Solid quality with high performance

Thanks to their modern design Solarwatt glass-glass modules deliver the highest long-term yields. They are robust and more resilient than their predecessors. PERC half-cut-cells enable modules that are optimized for maximum performance.

The solar cells are embedded almost indestructibly in the glass-glass composite and thus optimally protected against all weather effects and mechanical stress. Solarwatt can therefore offer a 30-year warranty on performance and product quality.



## PRODUCT QUALITY

- ammonia resistant
- intensive hailstorm resistant
- salt mist resistant
- LeTID tested
- 100 % plus-sorting
- PID protected
- snow-load warranty



## SERVICE

### simple returns policy

as per „Delivery terms for Solarwatt solar modules“


### 30 year product warranty

as per „Warranty conditions for Solarwatt solar modules“

### 30 year performance warranty

on 87 % of nominal power as per „Warranty conditions for Solarwatt solar modules“

## DIMENSIONS

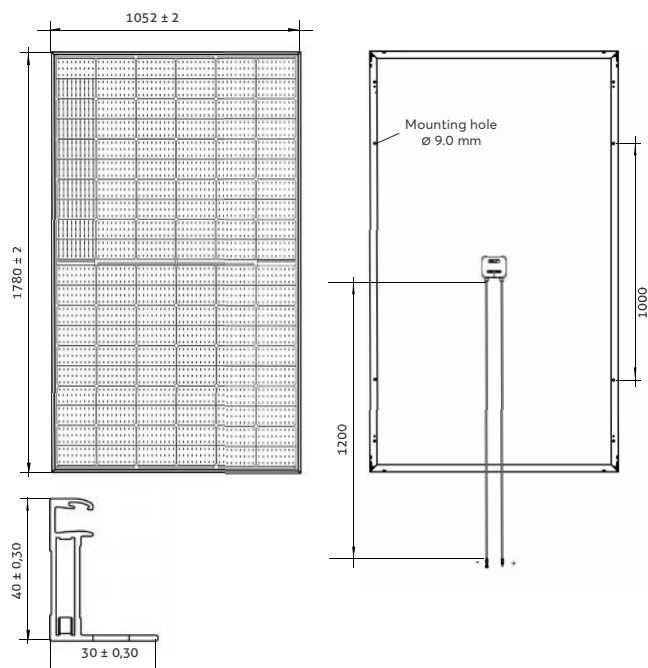

## GENERAL DATA

Module technology	Glass-glass laminate; aluminum frame
Covering material	Tempered solar glass with anti-reflective finish, 2 mm
Encapsulation	Solar cells in polymer encapsulation, white
Backing material	Tempered glass, 2 mm
Solar cells	120 monocrystalline high power PERC-solar cells
Cell dimensions	166 x 83 mm
L x W x H / Weight	1,780 <sup>±2</sup> x 1,052 <sup>±2</sup> x 40 <sup>±0,3</sup> mm / appr. 25 kg
Connection technology	Cables 2 x 1,2 m/ 4 mm <sup>2</sup> Stäubli Electrical MC4 connectors
Bypass diodes	3
Max. system voltage	1,000 V
IP rating	IP67
Protection class	II (acc. to IEC 61140)
Fire class	B (acc. to IEC 61730/UL 790) E (acc. to EN 13501-1) B <sub>ROOF</sub> (t1) (acc. to EN13501-5)
Certified mechanical ratings as per IEC 61215	Suction load up to 2,400 Pa (test load 3,600 Pa) Pressure load up to 5,400 Pa (test load 8,100 Pa)
Recommended stress load as per Installation Instructions	Please refer to the specifications in the Installation Instructions and Warranty Conditions.
Qualifications	IEC 61215   IEC 61730   LeTID   IEC 61701 IEC 62804   IEC 62716   MCS 005

## ELECTRICAL DATA (STC)

STC (Standard Test Conditions): Irradiation intensity 1,000 W/m<sup>2</sup>, spectral distribution AM 1,5 | Temperature 25 ± 2 °C, in accordance to EN 60904-3

Nominal power P <sub>max</sub>	365 Wp	370 Wp	375 Wp
Nominal voltage V <sub>mp</sub>	34,5 V	34,6 V	34,7 V
Nominal current I <sub>mp</sub>	10,7 A	10,8 A	10,9 A
Open circuit voltage V <sub>oc</sub>	41,2 V	41,3 V	41,4 V
Short circuit current I <sub>sc</sub>	11,2 A	11,3 A	11,4 A
Module efficiency	19,6 %	19,9 %	20,2 %

Measurement tolerances: P<sub>max</sub> ±5 %; V<sub>oc</sub> ±3 %; I<sub>sc</sub> ±5 %, I<sub>mp</sub> ±5 %

Reverse-current power rating I<sub>r</sub>: 20 A, operating modules with an external power source is only permissible if using a phase fuse with a tripping current of ≤ 20 A.

## ELECTRICAL DATA (NMOT AND WEAK LIGHT)

NMOT (Nominal Module Operating Temperature): Irradiation intensity 800 W/m<sup>2</sup>, spectral distribution AM 1,5, Temperature 20 °C  
Weak light conditions: Irradiation intensity 200 W/m<sup>2</sup>, Temperature 25 °C, Wind speed 1 m/s, load operation

Nominal power P <sub>max @NMOT</sub>	271 W	275 W	279 W
Nominal power P <sub>max @200 W/m<sup>2</sup></sub>	71,4 W	72,4 W	73,3 W

Measurement tolerances: P<sub>max</sub> ±5 %; V<sub>oc</sub> ±3 %; I<sub>sc</sub> ±5 %, I<sub>mp</sub> ±5 %


Reduction of module efficiency when irradiance is reduced from 1,000 W/m<sup>2</sup> to 200 W/m<sup>2</sup> (at 25 °C): 4 ± 2 % (relative) / -0,6 ± 0,3 % (absolute).

## THERMAL FEATURES

Operating temperature range	-40 ... +85 °C
Ambient temperature range	-40 ... +45 °C
Temperature coefficient P <sub>max</sub>	-0,37 %/K
Temperature coefficient V <sub>oc</sub>	-0,27 %/K
Temperature coefficient I <sub>sc</sub>	0,04 %/K
NMOT	44 °C

## CHARACTERISTIC LINES (PERFORMANCE CLASS 370 WP)

Voltage characteristic line at different temperatures and irradiances

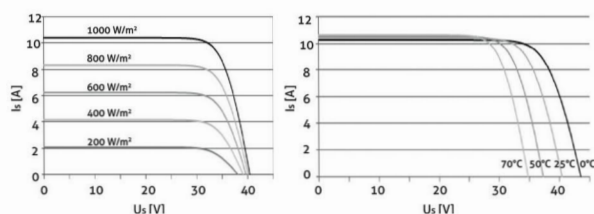

## TRANSPORT AND PACKAGING

Modules per palette	22
Palette dimensions (gross) L x W x H	1,800 x 1,070 x 1,120 mm
Gross weight per palette	592 kg
Pallets per container (double stacked)	24
Modules per container	528